

Ahlstrom-Munksjö **FineFiber GT**

Pulse-jet filtration media for gas turbines operating in variable weather conditions with fine and heavy pollution.

Quality of air entering the turbine is a significant factor in the performance and lifetime of the gas turbine. Ahlstrom-Munksjö offers a complete range of filtration media developed for gas turbine applications, to meet specific market needs in various operational environments.

Ahlstrom-Munksjö **FineFiber GT** portfolio is based on our market reference CellTech filtration media, but laminated with proprietary Fine Fibers on the upstream side.

With a self-supported structure, it combines leading performance in pleatability, with optimal mechanical filtration and excellent self-cleaning behaviour, delivering longer lifetime.

Ahlstrom-Munksjö **FineFiber GT** is the alternative choice when more traditional media are facing lifetime issues due to challenging environmental conditions.

Benefits

- ✓ **Delivers 3 levels of efficiency** – enabling adjustment of filtration performance for different characteristics of pollution.
- ✓ **Unique 3D design and excellent water repellency** – limiting media clogging in humid and urban environment.
- ✓ **Optimal back-pulsing behaviour** – delivering longer time between service intervals.
- ✓ **High corrugation** – offering ideal performance for pleatability.


Ahlstrom-Munksjö FineFiber GT

XAirGT-F7, XAirGT-F8 and XAirGT-F9 are our main **FineFiber GT** offering, reaching respectively ePM2.5 60%, ePM1 70% and ePM1 80% according the new ISO 16890 standard. These 3 grades deliver an optimal balance of particulate efficiency and pressure drop, for different characteristics of pollution.

The unique 3D design of our proprietary polypropylene FineFiber layer, as well as a specific treatment of the base material, prevents media clogging during instances of high humidity and also during high concentration levels of soot. This key property guarantees longer lifetime in challenging operating conditions.

In addition, the predominant surface filtration phenomena of the media enables very good pulse-jet cleaning behaviour comparable to the best nano-coated products.

Ideal pulse jet behavior according ISO 11057 (XAirGT-F9)

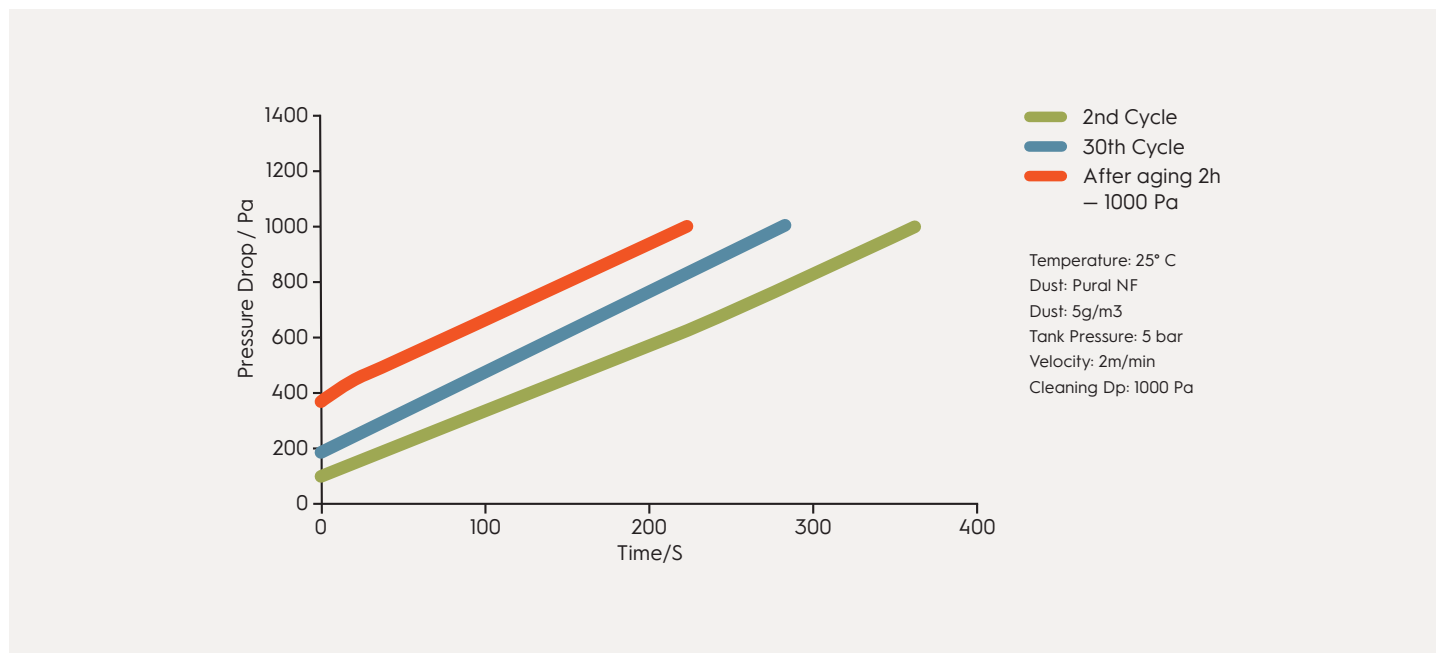

Ahlstrom-Munksjö FineFiber GT - Key Grade Characteristics

	Basis Weight	Efficiency Class		Thickness	Corrugation Depth	Air Permeability	MD Stiffness
Grades	g/m ²	EN779-2012	ISO16890	µm	µm	L/m ² /s @200 Pa	g
XAirGT-F7	125	F7	ePM2.5 60%	440	230	320	2.5
XAirGT-F8	130	F8	ePM1 70%	500	240	150	2.1
XAirGT-F9	140	F9	ePM1 80%	500	280	90	2.5

Contact Ahlstrom-Munksjö Sales: ✉ filtration@ahlstrom-munksjo.com

www.ahlstrom-munksjo.com



Disclaimer: The information supplied in this document is for guidance only and should not be construed as a warranty. All implied warranties are expressly disclaimed, including without limitation any warranty of merchantability of fitness for use. All users of the material are responsible for ensuring that it is suitable for their needs, environment and end use. All data is subject to change as Ahlstrom-Munksjö deems appropriate.

© Ahlstrom-Munksjö 2019